



SIDEWALK ACCESS RAMP

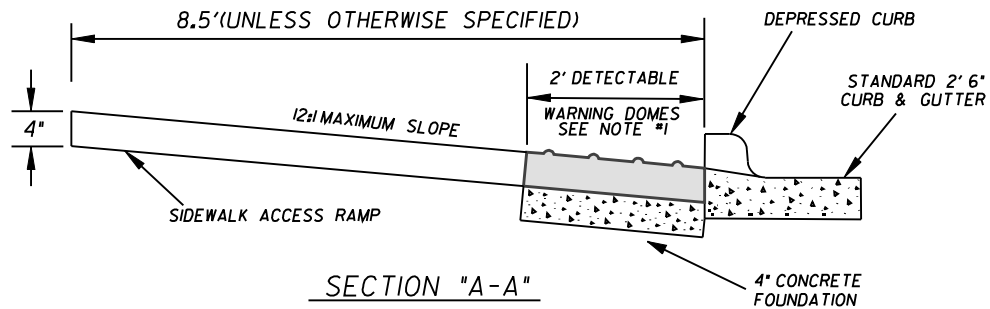

SECTION "A-A"
FOR ALL PUBLIC STREET TIE-INS

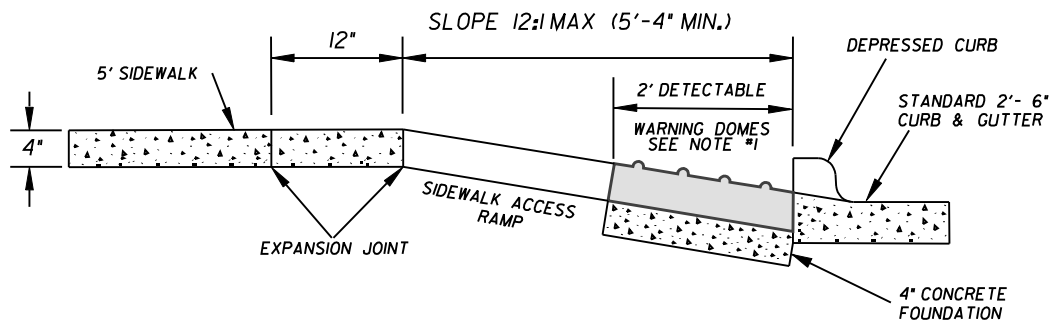

SECTION "B-B"
FOR RAMP AT ASPHALT TO ASPHALT STREET TYPE DRIVEWAYS
OR PRIVATE STREET TIE IN.

SHEET 2 OF 5

NOTES:

1. DETECTABLE WARNING DOMES SHALL COVER 2'-0" LENGTH AND FULL WIDTH OF THE RAMP FLOOR AS SHOWN ON DETAIL. MINIMUM SIZE OF PAVER SHALL BE 1' X 1'.
2. OBTAIN 70% CONTRAST VISIBILITY WITH ADJOINING SURFACE, EITHER LIGHT ON DARK, OR DARK ON LIGHT SEQUENCE COVERING THE DETECTABLE WARNING AREA.

CITY OF RALEIGH PUBLIC WORKS DEPARTMENT		
REVISIONS	DATE: 7/3/00	DRAWN BY: JTB
5/5/04 JTT	SIDEWALK ACCESS RAMPS TYPICAL LOCATION	
1/17/07 WDP		
5/31/07 JTT		
	STD. # 20.11	